




Automatic cross-line laser
with additional slope function

Rev.1116

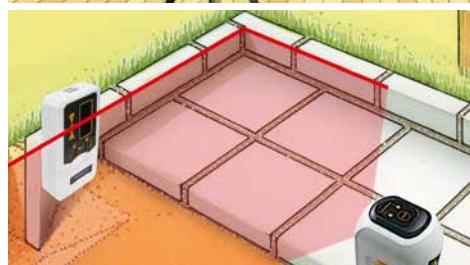

Automatic Level




Pendulum can be locked
for protection during
transport



1/4"-threads

TECHNICAL DATA

SELF-LEVELLING RANGE	$\pm 5^\circ$
ACCURACY	$\pm 0.5 \text{ mm / m}$
LEVELLING	automatic
OPERATING RANGE	(depending on room illumination) 10 m
LASER WAVELENGTH	650 nm
LASER CLASS	2 / < 1 mW
POWER SUPPLY	2 x 1.5V alkaline batteries (type AA, LR6)
OPERATING TIME	15 hours (alkaline batteries)
WORKING TEMPERATURE	0°C ... +40°C
STORAGE TEMPERATURE	-10°C ... +70°C
DIMENSIONS (W x H x D)	55 x 85 x 75 mm
WEIGHT	(incl. batteries) 260 g



SmartCross-Laser

+ batteries

Packing dimension (W x H x D)
125 x 320 x 105

ARTICLE	ARTICLE NO	EAN-CODE	PU
SmartCross-Laser	081.115A	4 021563 684533	5

