


TERMO




PICTURES




OPENING INSTRUCTIONS

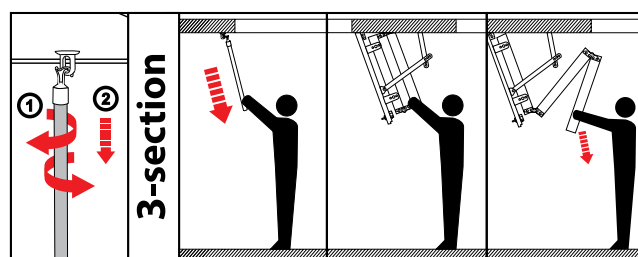

TECHNICAL DRAWINGS AND DIMENSIONS

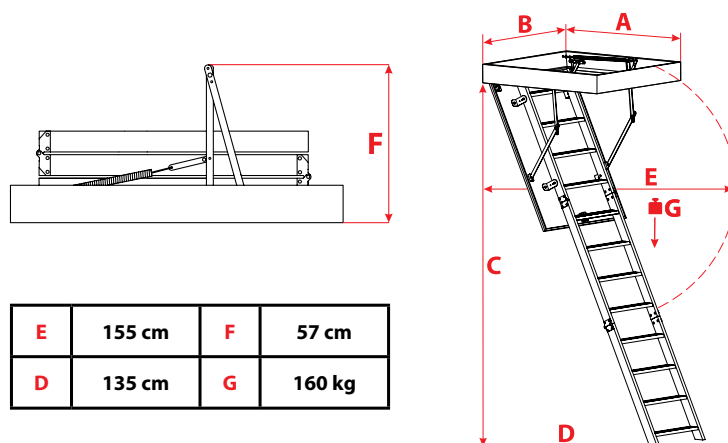

MAX. LOADING



BASIC

26 mm

INSULATED HATCH THICKNESS

WHITE

HATCH COLOUR FROM BOTH SIDES

3-SECTION
WOODEN LADDER

135 mm

HEIGHT OF WOODEN BOX

280 cm

MAXIMUM CEILING HEIGHT

ADDITIONAL ACCESSORIES



HANDRAIL



MASKING
BATTEN



MOUNTING
SYSTEM



GUARD RAIL



PROTECTIVE
FEET

BOX DIMENSIONS [cm]

OUTER BOX DIMENSIONS, MOUNTING HOLE 2 cm LARGER


110x55	120x55	130x55	140x55
110x60	120x60	130x60	140x60
110x70	120x70	130x70	140x70

NON-STANDARD BOX DIMENSIONS [cm]


DIMENSIONS GIVEN BELOW ARE APPROXIMATE DIMENSIONS ONLY

MIN-MAX LENGTH	110 - 140
MIN-MAX WIDTH	54 - 85
MINIMAL DIMENSION	110 x 54

THERMO-STOP SYSTEM




BASIC



GOOD



VERY GOOD



ENERGY SAVING

OMAN STANDARD



3 YEAR GUARANTEE

EN 14975

COMPLIANCE
WITH THE
STANDARD